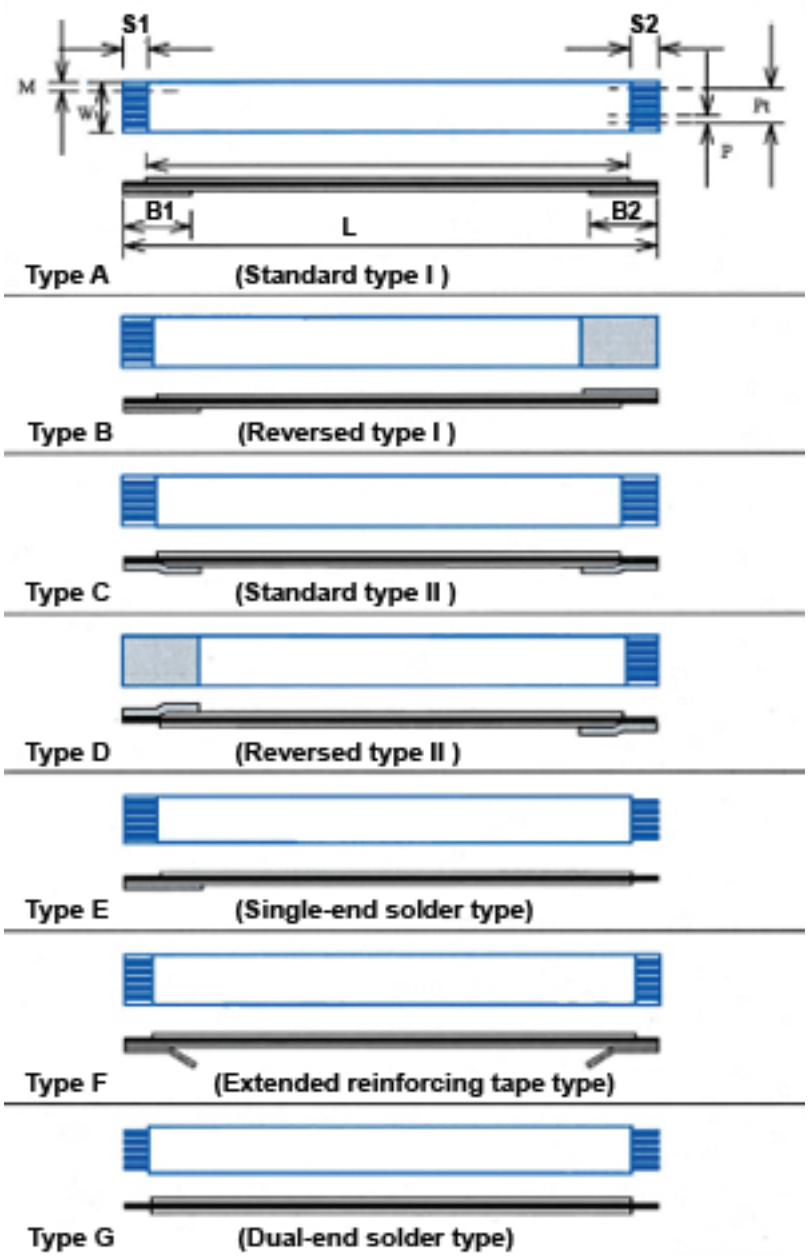

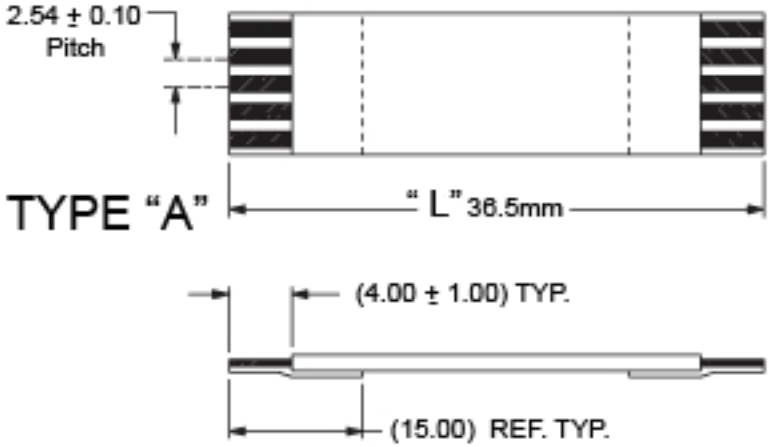

HOW TO ORDER:

F	C	X	X	X	-	4	X	X	X	X	X	X	X

# of Conductors (X X)
03 - 80

Type (X)
A=Type A
B=Type B
C=Type C
D=Type D
E=Type E
F=Type F
G=Type G

Pitch (4)
1=0.50mm
2=1.00mm
3=1.25mm
4=2.54mm

Strip Length (X X)
"S1 ; S2"
1=4.00mm Std.
Other Lengths
0=3mm
1=4mm
2=5mm
3=6mm

BackerLength (X)
"B1 ; B2"
1=6.00mm Std.
N - No Backing
0=5mm
1=6mm
2=8mm
3=10mm
4=15mm
5=20mm

Total Length (X X X X)
" L "
(25 to 1000)

Example -
Type A Cable, 2.54mm Pitch, 16mm Length, 4.00mm Strip Length, 15.00mm Backing Strip Length,Total Length 36.5mm, 10 Conductors
SMP Part Number = FC10A - 4114 - 36.5

Rev		Drawn	Checked	Approved	Date
0	Issued	B.S.	S.M.	S.M.	10/13/08
A	Added Backing Option	B.S.	S.M.	S.M.	09/16/10

SMP TECHNOLGY, INC.

FFC CABLE 2.54mm PITCH EXAMPLE

TOL. DEC. .X +/- .XX +/- .XXX +/- ANGLE +/- UNIT: mm

SERIES: FFC